
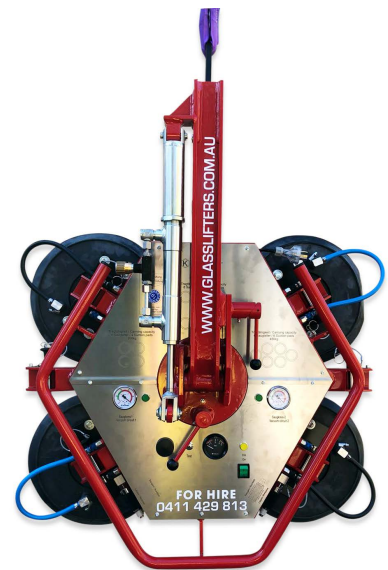


## 8P Spider SWL 600kg

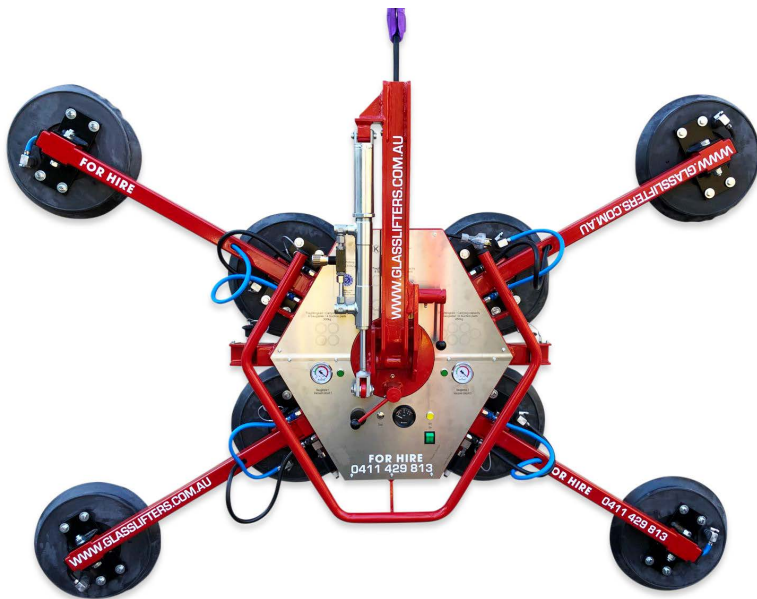

### DESCRIPTION

- Safe Working Load 600kg
- Hydraulic tilt assist
- Dual vacuum pumps
- Quick release pads and vacuum lines for easy configuration
- Direct lifting eye on frame to assist lifting overhangs and vertical hanging
- 190mm deep frame for working between structure and scaffold
- Audio-visual low vacuum alert

### SPECIFICATIONS

- **Min Glass Size:**
  - 150kg - 2 cups diagonal on main frame 1000mm x 400mm
  - 300kg - 4 cups on main frame 850mm x 750mm
  - 300kg - 4 cups inline (2 cups on extensions/2 on main frame) 2200mm x 500mm
  - 600kg - 8 cups (4 on main frame/4 on extensions) 1900mm x 1400mm
- **Max Glass Size:**
  - 2000mm x 2200mm (with cups on main frame)
  - 3000mm x 5000mm (with extension arms)
- **Lift Capacity:** 600kg
- **Total Rig Weight:** 75kg
- **Rig Size:** 705mm (Height) x 808mm (Width) x 200mm (Depth)
- **Tilt:** Manual - 90 degrees
- **Rotate:** Manual - 360 degrees

Providing Glass Lifting Solutions for the Construction Industry Since 2006

Phone: 0411 429 813

Email: [hire@glasslifters.com.au](mailto:hire@glasslifters.com.au)

Web: [www.glasslifters.com.au](http://www.glasslifters.com.au)